


METRO System 5 gulvstillet 110

Datablad

METRO System 5 gulvstillet 110

- | | |
|------------------------------------|---------------------|
| 9: Danfoss ECL110 | A: Fjernvarme Frem |
| 10: Tasseron TSB45IO | B: Fjernvarme Retur |
| 11: Tasseron TSB45IO | C: Koldt brugsvand |
| 12: Danfoss ESMT | D: Varmt brugsvand |
| 15: Afspærringsventil | F: Anlæg Frem |
| 16: Snavssamler | G: Anlæg Retur |
| 17: Ventil Frese Optima Compact | X: Beholder frem |
| DN15 High Flow 2,5, 100-575 l/h | Y: Beholder retur |
| 17A: Ventil Frese Optima Compact P | |
| DN15 High Flow 4,0, 93-786 l/h | |
| 18: Termostat Frese for Optima | |
| Compact 20-70°C | |
| 20: Siemens SSA331.00 | |
| 23: Passtykke 3/4"x110/165mm | |
| 24: Følerlomme 1/2" | |
| 27: Luftskrue 1/4" | |
| 28*: Bundhane | |
| 29: Grundfos UPM3 15-70, 130 | |
| 30: Kontraventil | |
| 31*: Sikkerhedsventil | |
| 37*: Beholder | |

* Tilkøbsmulighed

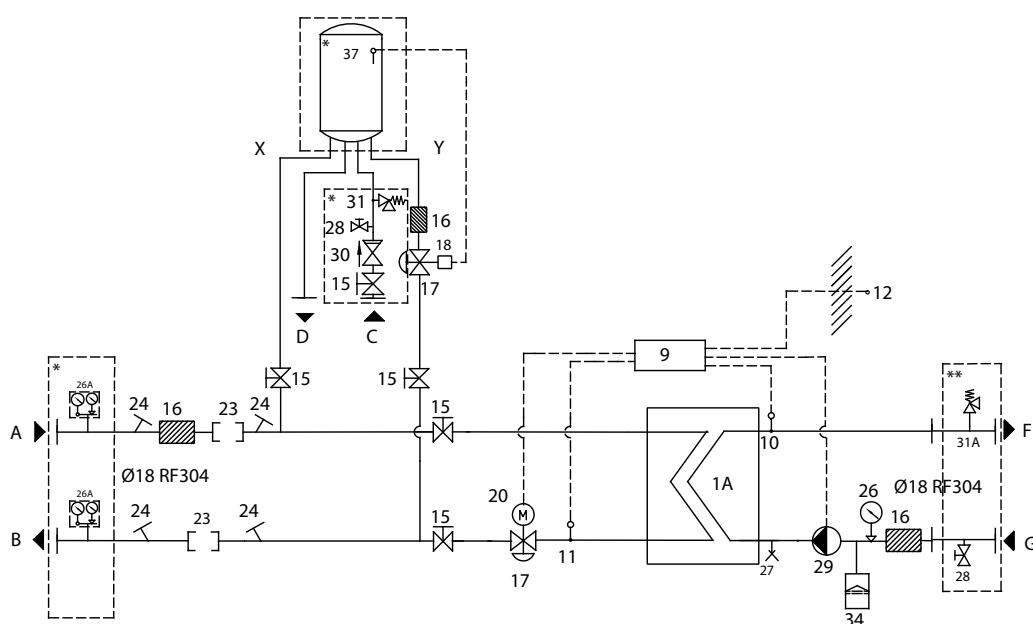

Forordning EU 2017/1369	Forordning EU 812/2013
Direktiv 2009/125/EF	Forordning EU 814/2013
Varmetab iflg. Standard - DS/EN12897 : 2016	

Varemærke	METRO THERM A/S
M.T. Varenummer	122522111
Model	2252
	122522111

Energieffektivitetsklasse	A
---------------------------	---

Stilstandstab S	30	(W)
-----------------	----	-----

Stilstandstab / Delta T	0,67	(W / K)
-------------------------	------	---------

Vandindhold	94	(l)
-------------	----	-----