





ENERG Y UA EHEPΓИЯ · ενεργεια (Ε) (ΙΑ)




METROAIR I 16 + METROAIR 330

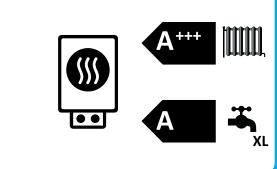

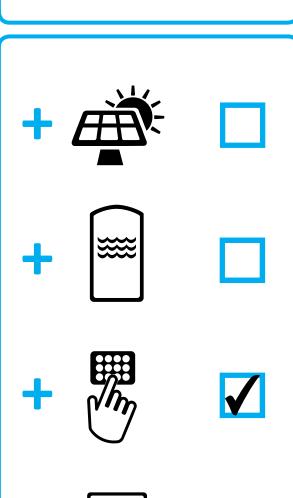



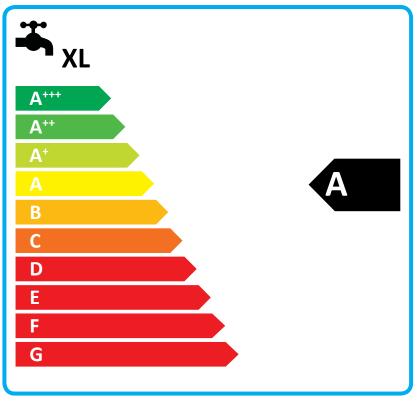

Supplier's name:	METRO THERM A/S		
Model:	Metroair I 16 -		
Temperature application	35	55	°C
Declared load profile for water	XL		
heating			
Seasonal space heating energy	A+++	A+++	
efficiency class, average climate:	A ···	A	
Water heating energy efficiency	A		
class, average climate:	,		
Rated heat output, average climate:	11	12,3	kW
Annual energy consumption for	4500	0504	
space heating, average climate	4502	6524	kWh
Annual electricity consumption for	4040		kWh
water heating, average climate	10	1616	
Seasonal space heating energy	400	450	24
efficiency, average climate:	199	153	%
Water heating energy efficiency,	11	D4	%
average climate:	104		70
Sound power level LWA indoors	3	35	
Rated heat output, cold climate:	13,0	14,0	kW
Rated heat output, warm climate:	13,0	13,0	kW
Annual energy consumption for	7543	9765	kWh
space heating, cold climate	7 040	9700	KVVII
Annual electricity consumption for	1758		kWh
water heating, cold climate			KVVII
Annual energy consumption for	3153	3867	kWh
space heating, warm climate			
Annual electricity consumption for water heating, warm climate	1448		kWh
Seasonal space heating energy		1	
efficiency, cold climate:	167	138	%
Water heating energy efficiency,	L		-
cold climate:	95		%
Seasonal space heating energy	217	177	%
efficiency, warm climate:	211	177	70
Water heating energy efficiency,	116		%
warm climate:	110		/0
Sound power level LWA outdoors	55		dB

Data for package fiche

Controller class	VI		
Controler contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	203	157	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A+++	%
Seasonal space heating energy efficiency of package, cold climate:	171	142	%
Seasonal space heating energy efficiency of package, warm climate:	221	181	%

Model(s):	Metroair I 16 + Metroair 330
Type of heat source/sink:	Air-to-water
Low-temperature heat pump:	No
Equipped with supplementary heater:	Yes
Heat pump combination heater:	Yes
Climate condition:	Average
Temperature application:	Medium temperature (55 °C)
Applied standards: EN1/1825 and EN161/17	•



Temperature application:		Medium temperature (55 °C)		nperature (55 °C)			
Applied standards: EN14825 and EN16147							
Rated heat output	Prated	12,3	kW	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	%		
Declared capacity for part load at outdoor temp	oerature Ti			Declared coefficient of performance for part load at outdoor temperatu	ıre Ti		
Tj = -7 °C	Pdh	10,9	kW	Tj = -7 °C COPd 2,48	-		
Tj = +2 °C	Pdh	6,7	kW	Tj = +2 °C COPd 3,96	-		
Tj = +7 °C	Pdh	5,9	kW	Tj = +7 °C COPd 4,67	-		
Tj = +12 °C	Pdh	6,0	kW	Tj = +12 °C COPd 5,67	-		
Tj = biv	Pdh	10,9	kW	Tj = biv COPd 2,48	-		
Tj = TOL	Pdh	11,6	kW	Tj = TOL COPd 2,40	-		
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C) COPd	-		
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature TOL -10	°C		
Cycling interval capacity for heating	Pcych		kW	Cycling interval efficiency COPcyc	-		
Degradation co-efficient	Cdh	0,99	-	Heating water operating limit WTOL 65	°C		
Power consumption in modes other than active	mode			Supplementary heater			
Off mode	P _{OFF}	0,025	kW	Rated heat output Psup 0,7	kW		
Thermostat-off mode	P _{TO}	0,007	kW				
Standby mode	P _{SB}	0,025	kW	Type of energy input Electric	Electric		
Crankcase heater mode	P _{CK}	0,037	kW	1			
Other items							
Capacity control	variable			Rated air flow rate, outdoors 4150	m³/h		
Sound power level, indoors/outdoors	L _{WA}	35/55	dB	Rated water flow rate, indoor heat exchanger variable	m³/h		
Annual energy consumption	Q _{HE}	6524	kWh	Rated brine or water flow rate, outdoor heat exchanger	m³/h		
For heat pump combination heater:							
Declared load profile		XL		Water heating energy efficiency η_{wh} 104	%		
	I			Tiwn 104	,,,		
Daily electricity consumption	Q _{elec}	7,36	kWh	Daily fuel consumption Q _{fuel}	kWh		
Annual electricity consumption	AEC	1616	kWh	Annual fuel consumption AFC	GJ		
Approved by:		<u> </u>	1	· · · · · · · · · · · · · · · · · · ·			
Contact details METRO THERM A/S Rundinsvej 55 DK-3220 Helsinge www.metrotherm.dk							