


METRO System 5 gulvstillet 200

Datablad

METRO System 5 gulvstillet 200

- | | |
|------------------------------------|---------------------|
| 9: Danfoss ECL110 | A: Fjernvarme Frem |
| 10: Tasseron TSB45IO | B: Fjernvarme Retur |
| 11: Tasseron TSB45IO | C: Koldt brugsvand |
| 12: Danfoss ESMT | D: Varmt brugsvand |
| 15: Afspærringsventil | F: Anlæg Frem |
| 16: Snavssamler | G: Anlæg Retur |
| 17: Ventil Frese Optima Compact | X: Beholder frem |
| DN15 High Flow 2,5, 100-575 l/h | Y: Beholder retur |
| 17A: Ventil Frese Optima Compact P | |
| DN15 High Flow 4,0, 93-786 l/h | |
| 18: Termostat Frese for Optima | |
| Compact 20-70°C | |
| 20: Siemens SSA331.00 | |
| 23: Passtykke 3/4"x110/165mm | |
| 24: Følerlomme 1/2" | |
| 27: Luftskrue 1/4" | |
| 28*: Bundhane | |
| 29: Grundfos UPM3 15-70, 130 | |
| 30: Kontraventil | |
| 31*: Sikkerhedsventil | |
| 37*: Beholder | |

* Tilkøbsmulighed

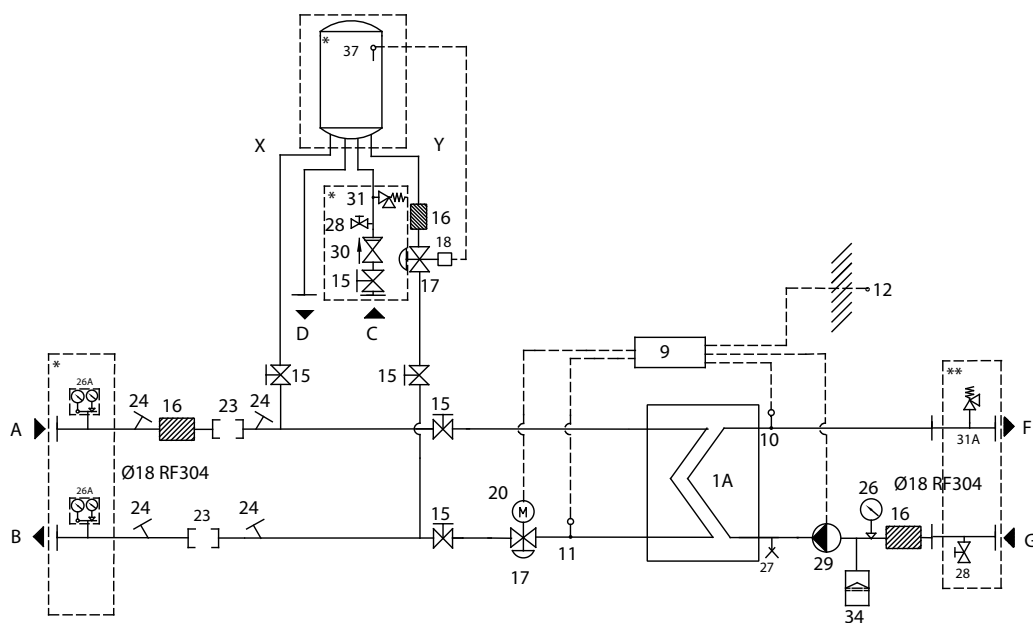

Forordning EU 2017/1369	Forordning EU 812/2013
Direktiv 2009/125/EF	Forordning EU 814/2013

Varmetab iflg. Standard	-	DS/EN12897 : 2016
-------------------------	---	-------------------

Varemærke	METRO THERM A/S
-----------	-----------------

M.T. Varenummer	122622122
-----------------	-----------

Model	2262
	122622122

Energieffektivitetsklasse	C
---------------------------	---

Stilstandstab S	70	(W)
-----------------	----	-----

Stilstandstab / Delta T	1,55	(W / K)
-------------------------	------	---------

Vandindhold	191	(l)
-------------	-----	-----