


METRO System 5 HOFOR gulvstillet 110

Datablad

METRO System 5 HOFOR gulvstillet 110

- | | |
|--|---------------------|
| 1A: Varmveksler XB06H+26 | A: Fjernvarme Frem |
| 9: Danfoss ECL210 m/A266.10 | B: Fjernvarme Retur |
| 10: Tasseron TSB45IO | C: Koldt brugsvand |
| 11: Tasseron TSB45IO | D: Varmt brugsvand |
| 12: Danfoss ESMT | F: Anlæg Frem |
| 13: Danfoss ESMB | G: Anlæg Retur |
| 15: Afspærringsventil | X: Beholder frem |
| 16: Snavssamler | Y: Beholder retur |
| 17: Ventil Frese Optima Compact | |
| DN15 High Flow 2,5, 100-575 l/h | |
| 20: Siemens SSA331.00 | |
| 23: Passtykke 3/4"x110/165mm | |
| 24: Dyklomme 1/2" (Til føler Ø5,2 mm) | |
| 24A: Dyklomme 1/2" (Til føler Ø5,8 mm) | |
| 25: Termometer | |
| 26: Manometer 0-4 Bar | |
| 26A: Termomanometer 120°C/0-16 Bar | |
| 27A: Udlufter | |
| 28: Bundhane | |
| 29: Grundfos UPM3 15-70, 130 | |
| 30: Kontraventil | |
| 31: Sikkerhedsventil 10 Bar | |
| 31A: Sikkerhedsventil 1/2"x3/4" 3 Bar | |
| 34: Trykekspon 12 L | |
| 37: Beholder | |

** Medleveret løst,
monteres uden for unitten

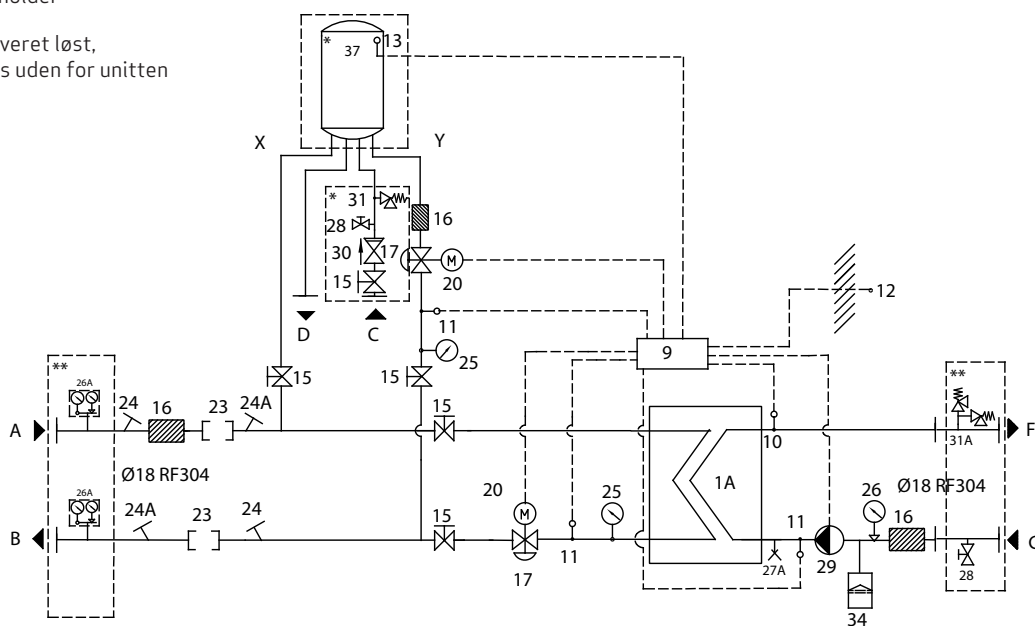

Forordning EU 2017/1369	Forordning EU 812/2013
Direktiv 2009/125/EF	Forordning EU 814/2013

Varmetab iflg. Standard	-	DS/EN12897 : 2016
-------------------------	---	-------------------

Varemærke	METRO THERM A/S
-----------	-----------------

M.T. Varenummer	122522121
-----------------	-----------

Model	2252
	122522121

Energieffektivitetsklasse	A
---------------------------	---

Stilstandstab S	30	(W)
-----------------	----	-----

Stilstandstab / Delta T	0,67	(W / K)
-------------------------	------	---------

Vandindhold	94	(l)
-------------	----	-----